


ULTRA-PANEL

The added rib and incredible lap makes Ultra-Panel easier to handle and stronger to walk on. Ultra-Panel installs squarely, maintaining its anti-siphon groove, eliminating the need for sidelap tape and stitch screws.
36" Coverage and 40 year warranty.

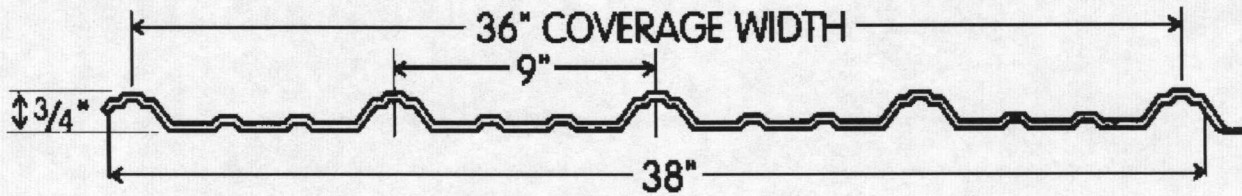

Custom lengths 3' to 40' (longer lengths, please inquire)

COLORS & GAUGES AVAILABLE

GA	Decimal Thickness	LB/LF	Galvanized	Beige	Black	Light Blue	Brown	Charcoal	Desert Brown	Dark Blue	Evergreen	Forest Green	Grey	Light Brown	Light Green	Light Stone	Red	Weathered Copper	White
			.0165	2.50	29	29	29	29	29	29	29	29	29	29	29	29	29	29	29

ALL CERAM-A-STAR 1050CC® SMP (SILICONE MODIFIED POLYESTER) PAINT SYSTEM
SEE COLOR CHART FOR ACTUAL COLORS

ULTRA-PANEL LOAD TABLE (REF. NOTES BELOW)
SPAN (PSF)

29 Gauge	24"	30"	36"	48"	60"
Live Load	158	101	70	36	19
Wind Load	205	131	91	47	25

NOTES:

- Galvanized sheets to be Zinc-Coated (galvanized) steel sheets per ASTM A4460 1.25 commercial coating class per ASTM A525 and ASTM A446 Grade E.
- Continuous over three spans.
- Structural design analysis per AISI Specification the Design of Cold-Formed Steel Structural Members, 1968.
- Weight of the sheet has been allowed.
- For wind loads, a 1/3 increase in loads is allowed.

INSTALLATION TIPS ON REVERSE SIDE